

# Corning® 50/125 Optical Fiber

## Product Information



Optical  
Fiber

### PI359

Issued: July 2001

Supersedes: December 2000

ISO 9001 Registered

## Corning Multimode Optical Fiber

Corning® 50/125 optical fiber is part of Corning's line of standard multimode fibers. It is a graded-index 50/125  $\mu\text{m}$  nominal multimode fiber with a 50  $\mu\text{m}$  core diameter and a 125  $\mu\text{m}$  cladding diameter. Corning 50/125 fiber offers full compatibility with legacy systems.

### Versatility

Corning 50/125 fiber is suitable for installation in all premises applications including back-bone, riser, and horizontal. Typical applications are local area and campus-wide networks carrying data, voice, and/or video services using light emitting diodes (LEDs), 850 nm vertical cavity surface emitting lasers (VCSELs), 780 nm CD lasers, and 1300 nm Fabry-Perot lasers. This product is specified by industry standards for fiber-optic network protocols, including Ethernet, Token Ring, fiber distributed data interface (FDDI), asynchronous transfer mode (ATM) and Fibre Channel.

### Coating

Corning fiber is protected for long-term performance and reliability by the CPC™ coating system. Corning's enhanced, dual acrylate CPC coatings provide excellent fiber protection and are easy to work with. CPC coatings are designed to be mechanically stripped and have a nominal outside diameter of 245  $\mu\text{m}$ . CPC coatings are optimized for use in many single and multi-fiber cable designs including loose tube, ribbon, slotted core and tight buffer cables.

### Quality, Consistency, Reliability

Corning 50/125 fiber offers consistent performance and proven reliability based on 150 years of glass-making experience and 30 years of fiber manufacturing. Every meter of fiber is taken through Corning's rigorous Quality Architecture Program and is produced by state-of-the-art manufacturing. Corning 50/125 fiber is backed by Corning's Center for Fiber Testing, a world leading resource for qualifying new products, system testing and customer support.

Corning leads the industry in standards development through its cooperative efforts with standards organizations worldwide. These include Telecommunications Industry Association (TIA), the Institute of Electrical and Electronics Engineers, Inc. (IEEE), ATM Forum and Fibre Channel.

## Technical Support

Every reel of Corning fiber is supported by hundreds of technical experts, ready to address any concerns related to optical fiber and its deployment. Corning's state-of-the-art tracking systems provide answers to specific questions on every reel of fiber produced and purchased.

## Optical Specifications

### Attenuation

≤ 2.5/0.8 dB/km @ 850/1300 nm

- No point discontinuity greater than 0.2 dB
- The attenuation at 1380 nm does not exceed the attenuation at 1300 nm by more than 3.0 dB/km
- The induced attenuation caused by wrapping the fiber 100 turns around a 75 mm mandrel shall not exceed 0.5 dB at 850 nm and 1300 nm

*Special attenuation cells available upon request.*

### Bandwidth

Standard Bandwidth Cells
400/400
400/600
400/1200
500/500
600/600
600/1000

*Other bandwidth cells available upon request.*

### Chromatic Dispersion

- Zero Dispersion Wavelength ( $\lambda_0$ ):  
1300 nm ≤  $\lambda_0$  ≤ 1320 nm
- Zero Dispersion Slope ( $S_0$ ):  
≤ 0.101 ps/(nm<sup>2</sup>•km)

$$\text{Dispersion} = D(\lambda) \approx \frac{S_0}{4} \left[ \lambda - \frac{\lambda_0^4}{\lambda^3} \right] \text{ps/(nm} \cdot \text{km)}$$

For 750 nm ≤  $\lambda$  ≤ 1450 nm,  $\lambda$  = Operating Wavelength

## Core Diameter

- 50.0 ± 3.0 μm

## Numerical Aperture

- 0.200 ± 0.015

## Environmental Specifications

Environmental Test Condition	Induced Attenuation (dB/km)	
	850 nm	1300 nm
Temperature Dependence -60°C to +85°C	≤ 0.20	≤ 0.20
Temperature - Humidity Cycling -10°C to +85°C and 4% to 98% RH	≤ 0.20	≤ 0.20

Operating Temperature Range -60°C to +85°C

## Dimensional Specifications

### Standard Length (km/reel)

- 1,100 - 8,800 meters
- Special lengths available upon request.

### Glass Geometry

- Cladding Diameter: 125.0 ± 2.0 μm
- Core-Clad Concentricity: ≤ 3.0 μm
- Cladding Non-Circularity: < 2.0%
- Core Non-Circularity: ≤ 5%

*Non-Circularity is defined as:*

$$\left[ 1 - \frac{\text{Min. Cladding Diameter}}{\text{Max. Cladding Diameter}} \right] \times 100$$

### Coating Geometry

- Coating Diameter: 245 ± 5 μm
- Coating-Cladding Concentricity: < 12 μm

## Mechanical Specifications

### Proof Test

- The entire length of fiber is subjected to a tensile proof stress ≥ 100 kpsi (0.7 GN/m<sup>2</sup>).

## Performance Characterizations

*Characterized parameters are typical values.*

### Effective Group Index of Refraction ( $N_{eff}$ )



- 1.490 at 850 nm
- 1.486 at 1300 nm

$N_{eff}$  was empirically derived to the third decimal place using a specific commercially available OTDR.

**Fatigue Resistance Parameter ( $n_d$ ): 20**

**Coating Strip Force**

- Dry: 0.6 lbs (2.7 N)
- Wet: 14 days in 23°C water soak: 0.6 lbs (2.7 N)

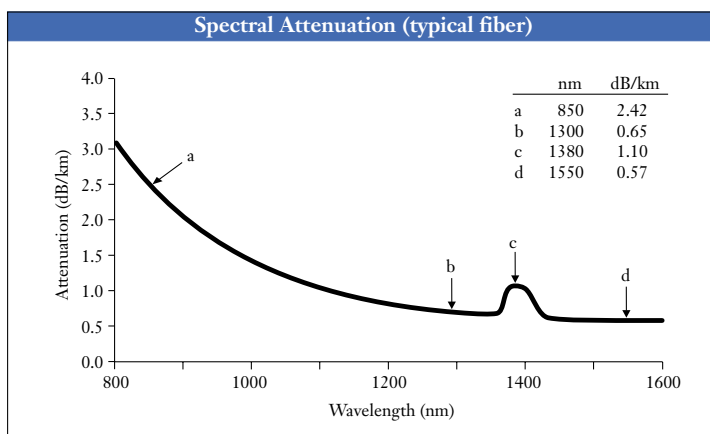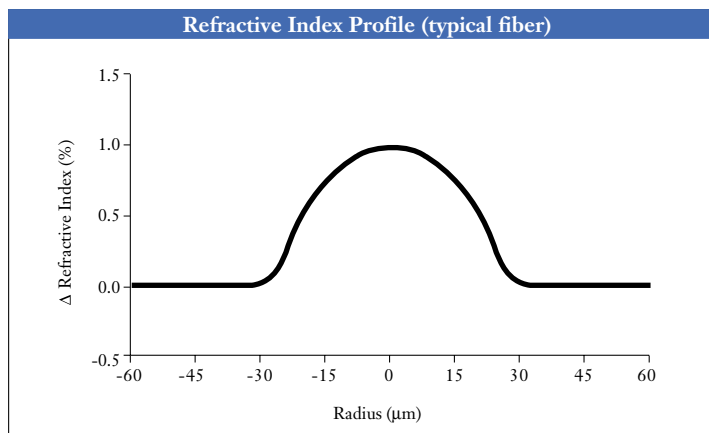

**Ordering Information**

To order Corning® 50/125 optical fiber, contact your sales representative, or call the Optical Fiber Customer Service Department at **910-395-7659** (North America) and **607-974-7174** (International). Please specify the following parameters when ordering.

**Fiber Type:** 50/125  $\mu\text{m}$  Multimode Fiber

**Fiber Quantity:** kms

**Proof Test:** 100 kpsi (0.7 GN/ $\text{m}^2$ )

**Other:** (Requested ship date, desired attenuation cell, desired bandwidth cell, etc.)

**Corning Incorporated**  
**www.corning.com/opticalfiber**

One Riverfront Plaza  
Corning, NY 14831  
U.S.A.

Phone: 800-525-2524 (U.S. and Canada)  
607-786-8125 (International)

Fax: 800-539-3632 (U.S. and Canada)  
607-786-8344 (International)

Email: [info@corningfiber.com](mailto:info@corningfiber.com)

**Europe**

Berkeley Square House  
Berkeley Square  
London W1X 5PE  
U.K.

Phone: +800 2800 4800 (U.K.\*, Ireland, France,  
Germany, The Netherlands, Spain and Sweden)  
\*Callers from U.K. dial (00) before the phone number

+800 781 516 (Italy)

+44 7000 280 480 (All other countries)

Fax: +44 7000 250 450

Email: [europe@corningfiber.com](mailto:europe@corningfiber.com)

**Asia Pacific**

Australia  
Phone: 1-800-148-690  
Fax: 1-800-148-568

Indonesia  
Phone: 001-803-015-721-1261  
Fax: 001-803-015-721-1262

Malaysia  
Phone: 1-800-80-3156  
Fax: 1-800-80-3155

Philippines  
Phone: 1-800-1-116-0338  
Fax: 1-800-1-116-0339

Singapore  
Phone: 800-1300-955  
Fax: 800-1300-956

Thailand  
Phone: 001-800-1-3-721-1263  
Fax: 001-800-1-3-721-1264

**Latin America**

Brazil  
Phone: 000817-762-4732  
Fax: 000817-762-4996

Mexico  
Phone: 001-800-235-1719  
Fax: 001-800-339-1472

Venezuela  
Phone: 800-1-4418  
Fax: 800-1-4419

**Greater China**

Beijing  
Phone: (86) 10-6505-5066  
Fax: (86) 10-6505-5077

Hong Kong  
Phone: (852) 2807-2723  
Fax: (852) 2807-2152

Shanghai  
Phone: (86) 21-6361-0826 ext. 107  
Fax: (86) 21-6361-0827

Taiwan  
Phone: (886) 2-2716-0338  
Fax: (886) 2-2716-0339

E-mail: [luyc@corning.com](mailto:luyc@corning.com)

Corning is a registered trademark of Corning Incorporated, Corning, N.Y.

©2001, Corning Incorporated